



INDUSTRIAL & ELECTRICAL FOG

HANDLINE NOZZLES

## Industrial & Electrical Fog

Our industrial fog nozzles were created to handle the rigors of industrial needs in refineries, chemical plants, office complexes and other on-site situations. Several different materials are available to suit every need, and most nozzles are U.L. listed.

The fog nozzles with the electrical specification in the chart are designed to be used on class "C" hazards and utilize only fog capabilities in combating blazes at 10' or more from live electrical equipment and/or circuits with voltage up to 250,000. All other industrial fog nozzles can be used in either straight stream or fog combinations.



# HANDLINE NOZZLES

INDUSTRIAL & ELECTRICAL FOG


HANDLINE NOZZLES

1-20

Base Size	AVAILABLE STANDARD FLOW RATES GPM (LPM)							FLOW TYPE	SHUT-OFF		CERT.	BASE			MATERIAL / FINISH				DIMENSIONS		MODEL	FIGURE					
	12 (45)	23 (87)	60 (227)	75 (284)	95 (360)	125 (473)	170 (644)		250 (946)	Fixed Flow		Variable Flow	Twist	Ball	Electrical	U.L. Listed	Rigid	Swivel	Free Swivel	Brass			Polycarbonate	Elk-O-Lite®	Length (Inches)	Weight (Lbs.)	
	PSI (BAR) 100 (6.89)								Satin											Chrome							
1"	•	•						•	•	•	•	•	•	s				s	o			4.50	2.50	S-205-B	1		
1.5"			•		•	•		•	•	•	•	•	•	s				s	o			5.00	2.875	L-205-B	3		
			•		•	•		•	•	•	•	•	•	s				s	o			4.75	4.125	L-200	2		
				•		•	•		•	•	•	•	•	s						s		4.875	0.375	1575	4		
					•			•	•	•	•	•	•	s				s	o			7.063	5.625	205-B	6		
					•			•	•	•	•	•	•	s				s	o			5.00	2.875	L-205-EB	3		
					•			•	•	•	•	•	•	s				s	o			3.00	1.50	L-206-T			
					•			•	•	•	•	•	•	s						s		4.875	0.375	1575-E	4		
					•			•	•	•	•	•	•	o	s	o		s	o			7.00	5.50	L-OE			
2.5"							•	•	•	•	•	•	•	s				s	o			7.375	2.875	NSL	5		
							•	•	•	•	•	•	•	s				s	o			7.063	5.625	205-EB	3		
							•	•	•	•	•	•	•	s				s	o			8.313	7.375	D-205-B	6		
							•	•	•	•	•	•	•	o	s	o		s	o			11.563	8.75	D-200	2		
						•	•	•	•	•	•	•	o	s	o		s	o			7.75	6.375	D-E				
						•	•	•	•	•	•	•	•	s				s	o			8.313	7.375	D-205-EB	6		

Key s = standard o = option

## FOG NOZZLE CONFIGURATIONS

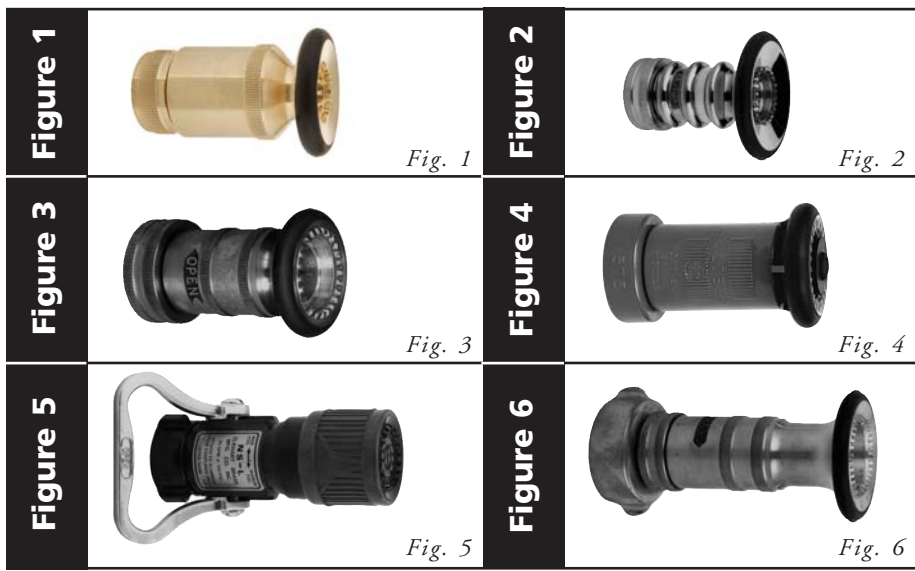

**OPTIONS**

**THREADS**

All nozzles are NHT unless otherwise specified. See index T-12 for optional base threads, including British instantaneous.

**HANDLES**

L-OE/NSL feature aluminum/bronze shut-off handles.

Figures depict general product types only and are not intended to be inclusive of all product features.